Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA DISTORTION UD300. This high-quality effects pedal delivers two distortion pedals in one—from blues-rock rhythms to searing leads. It features a mode switch that lets you choose between two different basic distortion sounds. You'll achieve the right tone for heavy metal leads, hard rock chordwork and much more.

1. CONTROLS

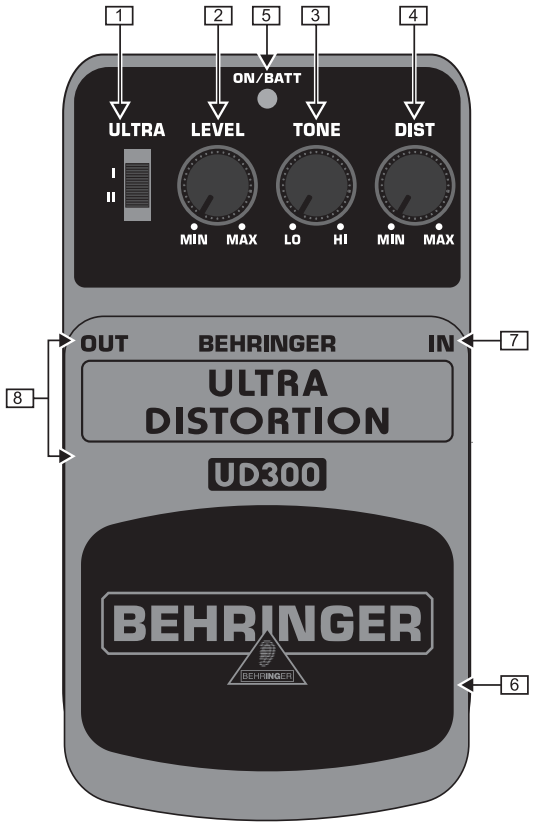

Top view

1 Use the *ULTRA* switch to chose between the two different distortion modes. Mode 1 provides warm and mellow distortion with flat frequency response. Mode 2 delivers biting distortion with a mid range boost that is perfect for leads.

2 The *LEVEL* control adjusts the output level.

3 The *TONE* control allows you to shape your overall sound.

4 The *DIST(ortion)* control adjusts the amount of distortion effect.

5 The *ON/BATT* LED illuminates when the effect is activated. It also serves as a battery level indicator.

6 Use the footswitch to activate/deactivate the effect.

7 Use this 1/4" TS *IN* connector to plug in the instrument cable.

8 The 1/4" TS *OUT* connector sends the signal to your amp.

Use the *DC IN* connection at the front of the unit to plug in a 9 V power supply (not included).

The *BATTERY COMPARTMENT* is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

☞ **The UD300 has no on/off switch. As soon as you insert the jack into the IN connector, the UD300 begins running. When not using the UD300, remove the jack from the IN connector. This extends the life of the battery.**

The *SERIAL NUMBER* is located at the bottom.

2. WARRANTY

For our current warranty terms, please refer to our website at http://www.behringer.com.

3. SPECIFICATIONS

In		
	Connector	1/4" TS
	Impedance	500 kΩ
Out		
	Connector	1/4" TS
	Impedance	1 kΩ
Power supply		9 V ⎓ , 100 mA regulated
		BEHRINGER PSU-SB
		USA/Canada 120 V~, 60 Hz
		China/Korea 220 V~, 50 Hz
		U.K./Australia 240 V~, 50 Hz
		Europe 230 V~, 50 Hz
		Japan 100 V~, 50 - 60 Hz
Power connector		2 mm DC jack, negative center
Battery		9 V type 6LR61
Power consumption		30 mA
Dimensions (H x W x D)		approx. 54 mm (2 1/8") x 70 mm (2 3/4") x 123 mm (4 4/5")
Weight		approx. 0.33 kg (0.73 lbs)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

4. SAFETY INSTRUCTIONS

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, **especially when power supply cord or plug is damaged.**

No utilizar cerca de agua o instalar cerca de fuentes de calor. Utilice sólo accesorios y aditamentos autorizados. No intenté reparar el producto usted mismo. Contacte a nuestro personal técnico cualificado para servicio y reparaciones, **especialmente cuando la fuente o el cable de alimentación estén dañados.**

Не эксплуатируйте прибор вблизи от источников воды и тепла. Применяйте только авторизованные дополнительные устройства. Никогда не ремонтируйте прибор самостоятельно. Ремонт может производить только квалифицированный специализированный персонал, **особенно при повреждениях сетевого провода или сетевой вилки.**

水分の近くや、ヒーターなど熱気のある場所では使用しないでください。正式に認可された付属品のみを使用してください。製品はご自分では決して修理せず、特に電源コードもしくはプラグが損傷した場合には、必ず製品サービスおよびリペアの資格を有した当社の担当員にご相談ください。

不要在靠近水源的地方使用，或在靠近热源的地方安装。只使用经过许可的附件 / 配件。不要自己进行产品维修，**尤其是当电源线或插座损坏的时候**，请联系我们的专业服务人员有关产品维修事宜。

Die deutsche Anleitung ist erhältlich @ www.behringer.com
Manuel francophone en téléchargement sur www.behringer.com
Manual en español disponible en www.behringer.com
Manuali italiani disponibili @ www.behringer.com
Русскоязычное руководство @ www.behringer.com
Polska instrukcja dostępna jest pod adresem @ www.behringer.com
Nederlandse handleiding beschikbaar @ www.behringer.com
Suomenkielinen käyttöohje saatavilla osoitteesta www.behringer.com
Svensk manual finns tillgänglig på www.behringer.com
Dansk vejledning findes på @ www.behringer.com
Manual português disponível @ www.behringer.com
Ελληνικό εγχειρίδιο υπάρχει διαθέσιμο στη διεύθυνση www.behringer.com
日本語版マニュアル@ www.behringer.com
使用说明书可在 www.behringer.com 下载

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH. BEHRINGER® is a registered trademark. ALL RIGHTS RESERVED. © 2006 BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany. Tel. +49 2154 9206 0, Fax +49 2154 9206 4903